





Copper Wire Mesh

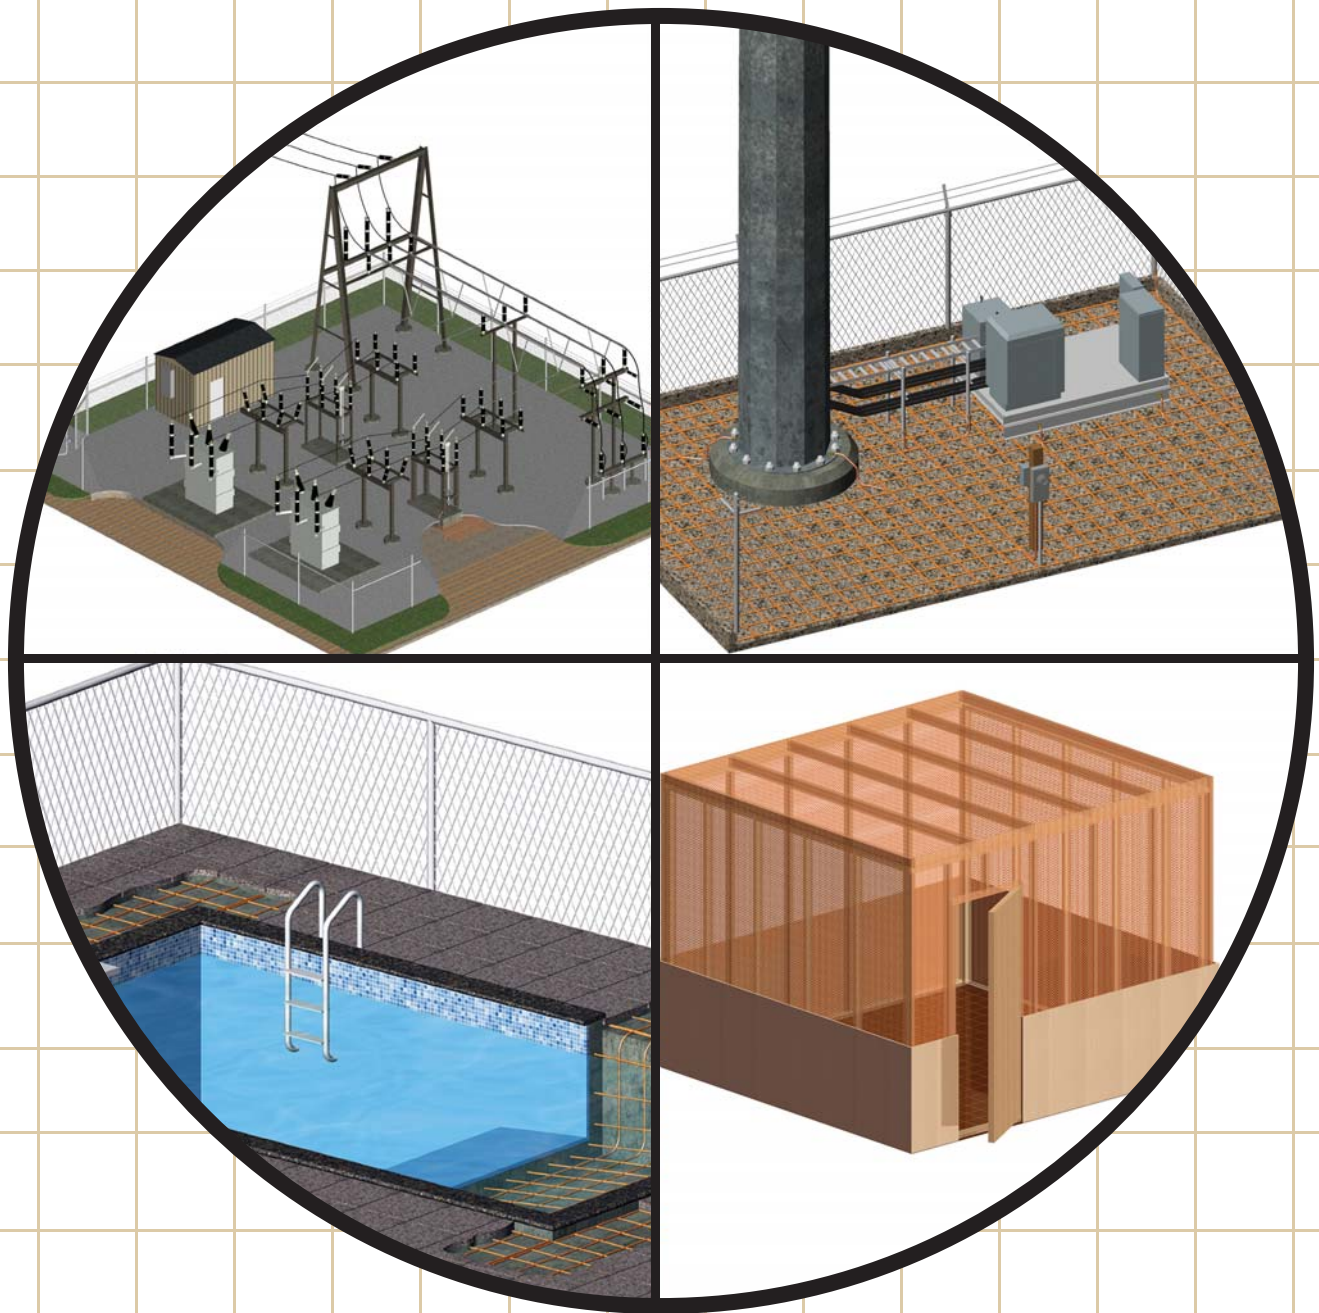

**Improving Ground Planes, Reducing
Step & Touch Voltages and RF Shielding**

Utility Application

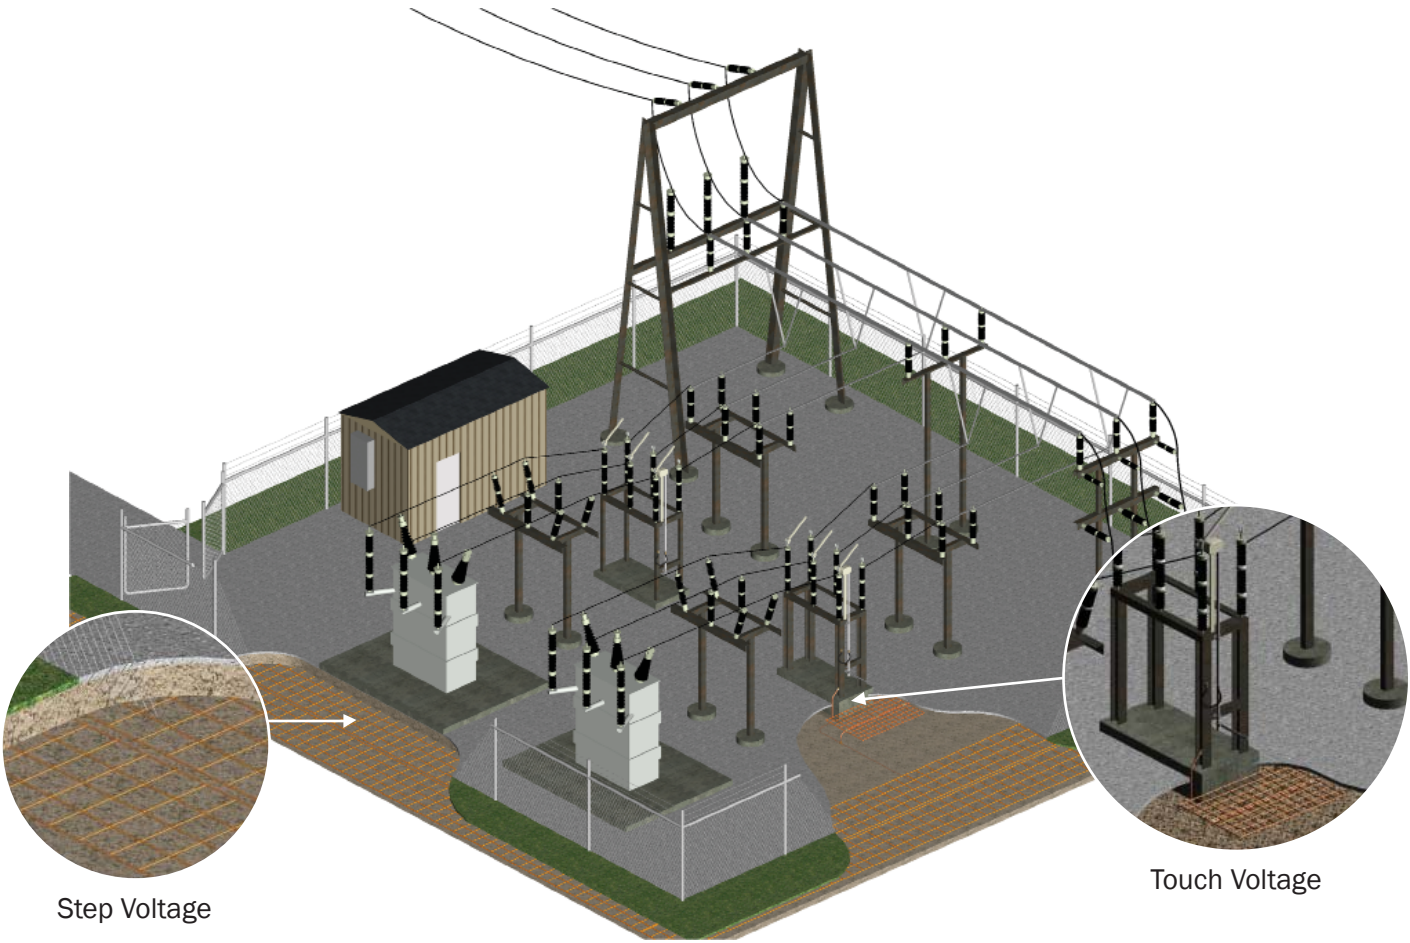


Step Voltage

Perimeter Ground Mesh provides protection against dangerous Step Voltages.

Standard Ground Mesh Sizes

Part No.	Width (ft.)	Length (ft.)	Conductor Size (AWG)	Conductor Spacing (in.)
GM450612	4	50	6	12
GM4100612	4	100	6	12
GM4150612	4	150	6	12

• Other mesh sizes and wire gauges available.

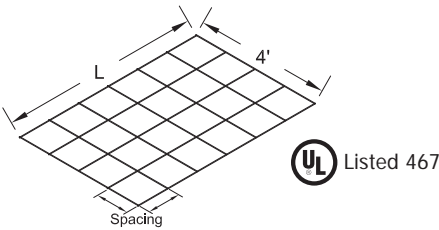

Touch Voltage


Harger personnel safety mats are designed to protect against Touch Voltages under fault conditions.

Standard Mat Sizes

Part No.	Width (ft.)	Length (ft.)	Conductor Size (AWG)	Conductor Spacing (in.)	Optional Center Wire
PSM4666C1/0S	4	6	6	6	1/0 Sol
PSM4644C2/0	4	6	4	4	2/0
PSM61066C4/0S	6	10	6	6	4/0 Sol

• Other mat sizes and wire gauges available.

Personnel Safety Mats

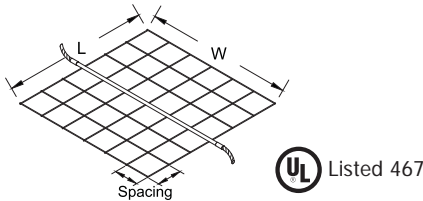

Communication Site Application





Equipotential Plane

Provides equipotential ground plane in environments with little top soil where standard ground systems are not feasible.

Ground Enhancement

Prefabricated ground mats can be used in conjunction with traditional grounding system designs.

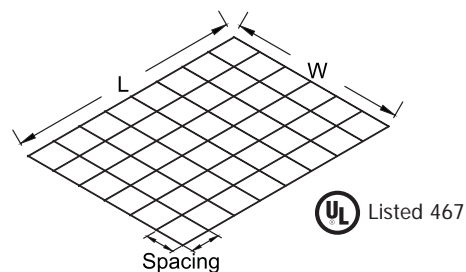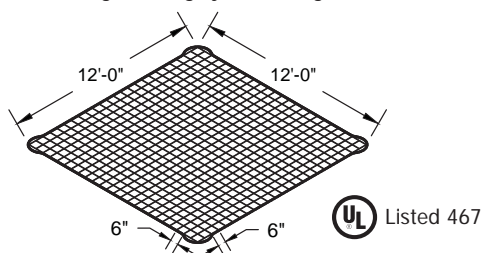

Part No.	Loop Conductor
GM121266	None
GM121266P2T	2T
GM121266SPR12	4/0-19T


- 12' x 12' prefabricated wire grounding mat with 6" squares made from #6 AWG solid copper.
- Perimeter conductor makes for easy attachment to ground conductors.
- Other mat sizes and wire gauges available.

Standard Mesh Sizes


Part No.	Width (ft.)	Length (ft.)	Conductor Size (AWG)	Conductor Spacing (in.)
GM125066	12	50	6	6
GM1250612	12	50	6	12
GM1250624	12	50	6	24

- For enhancing external grounding systems at radio, paging, cellular, etc. transmitting/receiving facilities.
- Mesh is silver brazed at all crossovers using a 15% or 35% silver brazing alloy and a non-corrosive flux.
- Other mesh sizes and wire gauges available.

Ultraweld Exothermic Molds



Part No.	Run	Tap	Weld Metal		Required Handle
			UltraShot	NUWTUBE	
PS6S6SL	#6 Sol	#6 Sol	US25	NUWTUBE25	MH3
PT2S6SB	#2 Sol	#6 Sol	US45	NUWTUBE45	MH1
PT4/06SB	4/0	#6 Sol	US90	NUWTUBE90	MH1
PT4/04/0B	4/0	4/0	US200	NUWTUBE200	MH1




Pool Grounding



Voltage Gradient Control


Ground Mesh is used to reduce Voltage Gradients in the pool area.

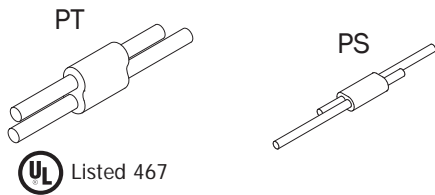

**Cable to Cable Ultraweld
Exothermic Connection Molds**

Part No.	Run	Tap	Weld Metal	
			UltraShot	NUWTube
PT8S8SB	#8 Sol	#8 Sol	US45	NUWTUBE45
PS8S8SL	#8 Sol	#8 Sol	US25	NUWTUBE25
PS8S6SL	#8 Sol	#6 Sol	US25	NUWTUBE25

- B mold requires MH1 handle.
- L mold requires MH3 handle (included).

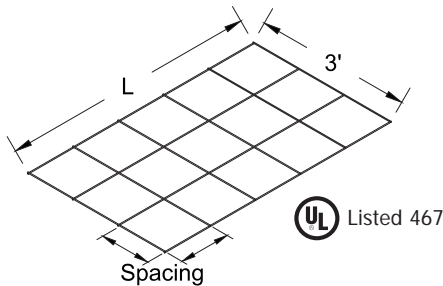


**UL Listed Prefabricated
#8 Solid Copper Ground Mesh**

Part No.	Width (ft.)	Length (ft.)	Conductor Spacing (in.)
GM350812	3	50	12
GM375812	3	75	12
GM3100812	3	100	12

- Other mesh sizes and wire gauges available.

Radio Frequency Application

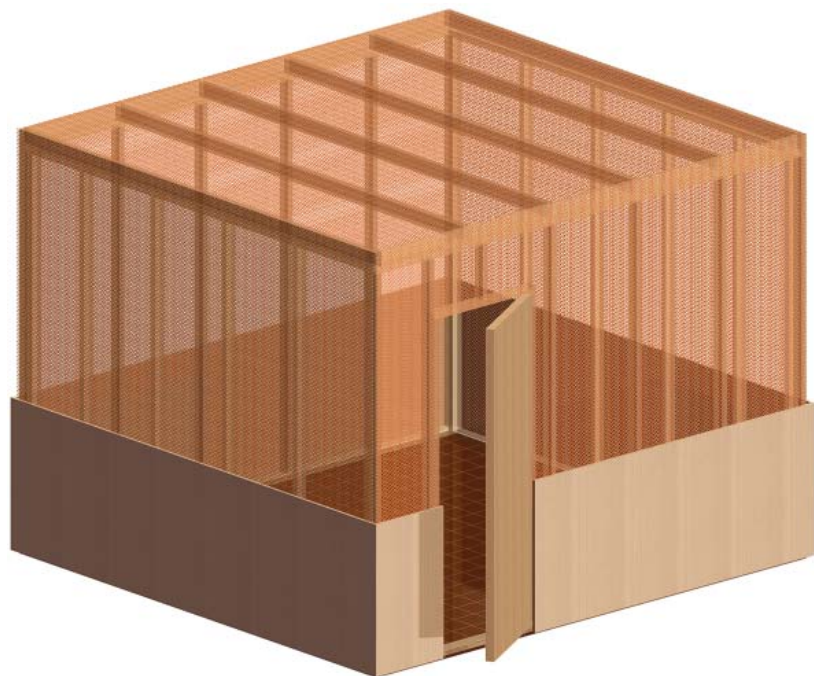


Radio Frequency


Expanded Copper Mesh can be used to eliminate RF interference.

Part Number	EXP3CU7100FA36100
Material	110 Copper
Base Metal Thickness	0.003 inches
LWD	0.100
Mesh Width	36 inches
Mesh Length	100 feet

- LWD determines shielding effectiveness.
- Other sizes and LWD dimensions available. Contact factory for more information.



Shielding Effectiveness for Expanded Metal
Open Area: 60 - 70%

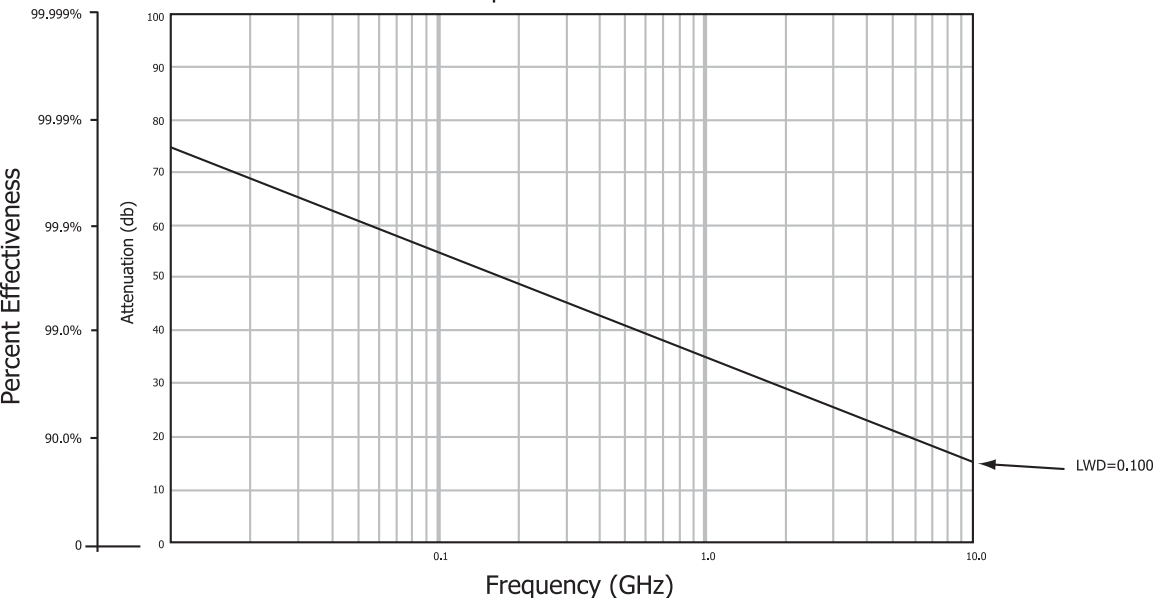



***Your Ultimate Source
for Engineered Solutions***



Harger Lightning & Grounding

301 Ziegler Drive, Grayslake, IL 60030

p 800.842.7437 • 847.548.8700 • f 847.548.8755

website: www.harger.com • e-mail: hargersales@harger.com

